


WIRE ROPE GROMMET SLINGS

Mechanically Flemished Grommet:

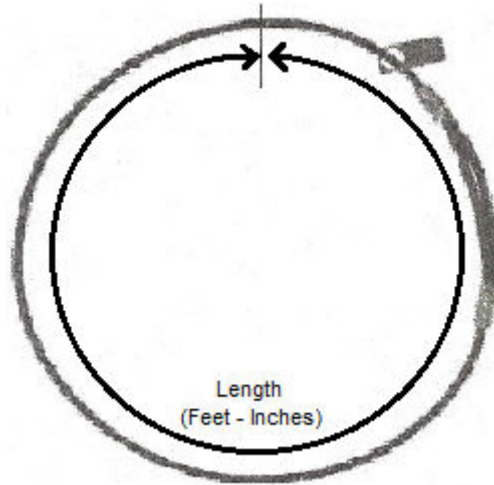

WIRE ROPE DIAMETER	MIN. SLING LENGTH (FEET-INCHES)	RATED CAPACITIES IN TONS		
		CHOKER	VERTICAL	VERTICAL BASKET
3/8"	2' - 8"	2.0	2.9	5.8
1/2"	3' - 4"	3.6	5.1	10.2
5/8"	4' - 0"	5.5	7.9	15.8
3/4"	5' - 0"	7.9	11.3	22.6
7/8"	5' - 8"	10.7	15.3	30.6
1"	6' - 6"	13.9	19.9	39.7

*Flemished splice

*Metal Tag

*6x19 class IWRC EIPS wire rope


*Proof testing available upon request

*Design factor of 5 to 1

Specify sling length when getting price quote and/or placing your order.

WIRE ROPE GROMMET SLINGS

Turnback sleeve Grommet:

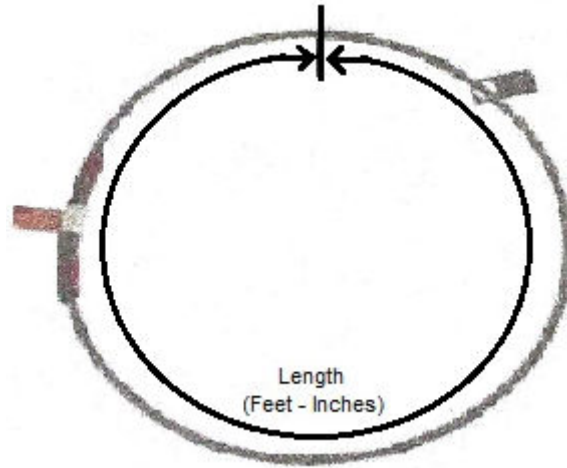

WIRE ROPE DIAMETER	MIN. SLING LENGTH (FEET-INCHES)	RATED CAPACITIES IN TONS		
		CHOKER	VERTICAL	VERTICAL BASKET
3/8"	2' - 8"	1.6	2.4	4.7
1/2"	3' - 4"	2.9	4.1	8.3
5/8"	4' - 0"	4.5	6.4	12.9
3/4"	5' - 0"	6.4	9.2	18.3
7/8"	5' - 8"	8.7	12.4	24.8
1"	6' - 6"	11.3	16.1	32.3

*Turnback termination

*Metal Tag

*6x19 class IWRC EIPS wire rope


*Proof testing available upon request

*Design factor of 5 to 1

****Specify sling length when getting price quote and/or placing your order.****

WIRE ROPE GROMMET SLINGS

Strand Laid Grommet:

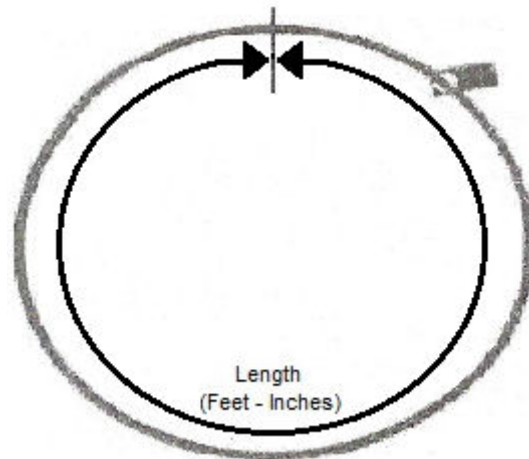

WIRE ROPE DIAMETER	RATED CAPACITIES IN TONS		
	CHOKER	VERTICAL	VERTICAL BASKET
3/8"	1.6	2.4	4.7
1/2"	2.9	4.1	8.3
5/8"	4.5	6.4	12.9
3/4"	6.4	9.2	18.3
7/8"	8.7	12.4	24.8
1"	11.3	16.1	32.3

*Strand laid hand tucked splice

*Metal Tag

*6x19 class IWRC EIPS wire rope

*Proof testing available upon request

*Design factor of 5 to 1

****Specify sling length when getting price quote and/or placing your order.****